




DIVA DIY PROFILE

extruded aluminium

Code	Length	Finish
3177405/200	2000mm	aluminium
3177405/300	3000mm	aluminium
3177432/200	2000mm	black matt
3177432/300	3000mm	black matt

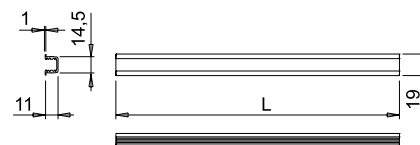

DIVA DIY DIFFUSER

extruded polycarbonate

Code	Length	Finish
3032101/200	2000mm	white
3032101/300	3000mm	white



DIVA DIY ENDS

for blind-milling

Code	Model	Finish
4005310	DIVA	aluminium
4005332	DIVA	black matt

DIVA DIY

recessed profile

DIVA is a profile with symmetrical light projection, designed for recessed installation in a blind- or through-milled groove measuring 14.5 mm wide and 12 mm deep, recommended for use under shelves. The shape of the profile, with two protrusions, conceals any irregularities of the groove edges (mouse-bites). DIVA integrates LED modules with adhesive base, 6mm and 8mm wide.

DIVA DIY

compatibility with light sources

FLEXYLED

single colour



Code	Model	Length	LED/m	Divisibility	W/m @V	Temperature	CCT	lm/m	lm/W	CRI	EEC
1590701B1/SHE	SHE6B PRO	10m	180 LED/m	33,3mm (6 LED)	14,4W/m @24VDC	super warm white	2700 K	1420	99	Ra 80	F
1590701B1/SHE	SHE6B PRO	10m	180 LED/m	33,3mm (6 LED)	14,4W/m @24VDC	warm white	3000 K	1420	99	Ra 80	F
1590701B1/SHE	SHE6B PRO	10m	180 LED/m	33,3mm (6 LED)	14,4W/m @24VDC	natural white	4000 K	1420	99	Ra 80	F
F0298000001	SHEP6B EVO	10m	216 LED/m	41,7mm (9 LED)	5,6W/m @24VDC	super warm white	2700 K	1040	186	Ra 85	C
F0298000002	SHEP6B EVO	10m	216 LED/m	41,7mm (9 LED)	5,6W/m @24VDC	warm white	3000 K	1040	186	Ra 85	C
F0298000003	SHEP6B EVO	10m	216 LED/m	41,7mm (9 LED)	5,6W/m @24VDC	natural white	4000 K	1100	196	Ra 85	B
1394101B1/UHE/2000	UHE6B	20m	280 LED/m	25mm (7 LED)	10W/m @24VDC	super warm white	2700 K	910	91	Ra 90	G
1394101B/UHE/2000	UHE6B	20m	280 LED/m	25mm (7 LED)	10W/m @24VDC	warm white	3100 K	940	94	Ra 90	F
1394101N/UHE/2000	UHE6B	20m	280 LED/m	25mm (7 LED)	10W/m @24VDC	natural white	4200 K	980	98	Ra 90	F
1557601B1/2000	HE8B	20m	120 LED/m	50mm (6 LED)	9,6W/m @24VDC	super warm white	2700 K	820	85	Ra 90	G
1557601B/2000	HE8B	20m	120 LED/m	50mm (6 LED)	9,6W/m @24VDC	warm white	3000 K	840	87	Ra 90	G
1557601N/2000	HE8B	20m	120 LED/m	50mm (6 LED)	9,6W/m @24VDC	natural white	4000 K	880	92	Ra 90	G

FLEXYLED

dual colour



Code	Model	Length	LED/m	Divisibility	W/m @V	Temperature	CCT	lm/m	lm/W	CRI	EEC
1552701/2000	SHE6B D-M	20m	168+168 LED/m	41,7mm (7+7 LED)	10W/m @24VDC	white D-Motion	2700-4000 K	780	78	Ra 90	G
F0218000007	UHE6B CSP D-M	20m	304+304 LED/m	26,3mm (8+8 LED)	10W/m @24VDC	white D-Motion	2700-4000 K	968	97	Ra 92	F

FLEXYLED

dual colour wave



Code	Model	Length	LED/m	Divisibility	W/m @V	Temperature	CCT	lm/m	lm/W	CRI	EEC
F0091000001	HE6B D-MWA	10m	120+120 LED/m	50mm (6+6 LED)	9,6W/m @24VDC	white D-Motion Wave	2700-4000 K	1054	110	Ra 81	F



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.



<https://www.domusline.com/warning-dyi-profiles/>