


ECGD-1 75/24D



Code	F0125000043	24Vdc	Micro 24
------	-------------	-------	----------

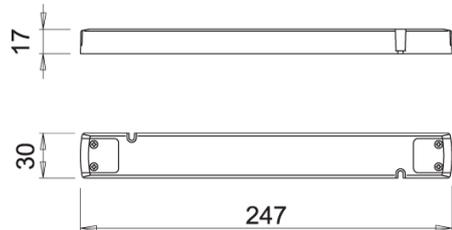

Rated voltage	220-240 VAC
Frequency	50/60 Hz
Output voltage	24 VDC
Pcg (Maximum output power)	75W
Full-load efficiency	91%
Pno (No-load power)	0,45W
Psb (Stand by power)	0,45W
Pnet (Network stand by power)	n.a.
Ta (Operation temperature)	-20... +45 °C
Tc (Enclosure temperature)	90 °C max
Dimension L x B x H	247 x 30 x 17 mm
Net weight	170 g

CE UKA   SELV  



Features

- IP20 independent electronic power supply for LED lighting fixtures
- Class II protection against electric shock from direct and indirect contact.
- 1800 mm power cord with UE two-pole plug.
- 500 mm output cable and 24 VDC max. 3 A connection system with 10 female Micro24 connectors.
- Protections:
 - short circuit and over temperature
 - against over mains voltage
 - against over load
- Not dimmable on the primary.
- Internal use.
- EU 2019/2020 (Ecodesign) regulation compliant.