





PENDY UHE

Lenght	Watt	Volt
900mm	16,8W/m	240VAC
1200mm	22,6W/m	240VAC

230V

2700 3000 4000



PENDY UHE XD

with CALL ME remote controller



Lenght	Watt	Volt
900mm	16,8W/m	240VAC
1200mm	22,6W/m	240VAC

230V

2700 3000 4000




The CALL ME remote control, supplied with PENDY UHE XD, enables switching the individual luminaire on and off and adjusting its brightness (10–100%).

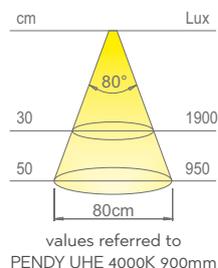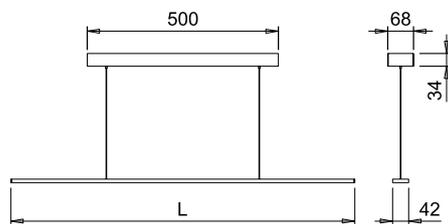

Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	1820 lm/W	1820 lm/W	1820 lm/W
Luminous efficiency	95 lm/m	95 lm/m	95 lm/m
CRI	Ra 90	Ra 90	Ra 90

PENDY

suspended LED profile

PENDY is a suspended LED profile with symmetric light projection for ceiling installation, ideal for use above kitchen island applications. PENDY is supplied with steel cables allowing precise height adjustment through a practical push/pull system. PENDY can be configured with the CALL ME remote control (PENDY XD version), pre-paired with the luminaire, enabling switching on and off and adjusting the brightness (10–100%) of the individual luminaire. PENDY integrates either a single-colour LED module with 240 LEDs/m (UHE 3000 K) or a twin-LED module with 280 LEDs/m (UHE 2700 K and 4000 K), and is supplied with a mains connection system. Power supply included.



aluminium



black matt





PENDY UHE D-M XD

with CALL ME D-M remote controller

Lenght	Watt	Volt
900mm	16,8W/m	240VAC
1200mm	22,6W/m	240VAC



The CALL ME D-M remote control, supplied with PENDY UHE D-M XD, enables switching the individual luminaire on and off, adjusting the brightness (10–100%), and selecting the colour temperature in White Changeable (WHC) mode.

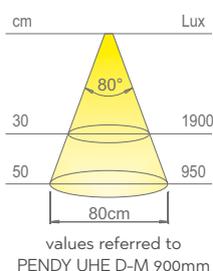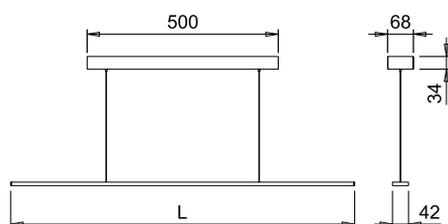

Colour appearance	white D-Motion
Colour temperature	2700 - 4000 K
Luminous flux	1820 lm/W
Luminous efficiency	95 lm/m
CRI	Ra 90

PENDY D-M

suspended dual-colour LED profile

PENDY D-Motion is a suspended LED profile with symmetric light projection for ceiling installation, recommended for kitchen island applications. PENDY D-M is supplied with steel cables allowing precise height adjustment through a practical push/pull system. PENDY D-M is configured with the CALL ME D-M remote control (PENDY D-M XD version), pre-paired with the luminaire, enabling switching on and off, brightness adjustment (10–100%), and colour temperature selection in White Changeable (WHC) mode for the individual luminaire. PENDY D-M integrates a dual-colour LED module with 280+280 LEDs/m (UHE) and is supplied with a mains connection system. Power supply included.



aluminium



black matt

This product contains a light source of energy efficiency class **F**.