




Tenditore da incasso tipo TN211 TN213 TN214

Recessed wardrobe adjusters TN211 TN213 TN214 type

NORMALMENTE ASSEMBLATI SU PANNELLI DI LEGNO O AGGLOMERATI E TAMBURATI. FISSAGGIO CON VITI. SPESSORE MINIMO 16. INTERASSE MIN 1200 MAX 2800

NORMALLY ASSEMBLED ON WOODEN PANELS OR AGGLOMERATES AND HOLLOW WOOD PANELS. FIXING WITH SCREWS. MINIMUM THICKNESS 16. CENTRE DISTANCE: MINIMUM 1200 MAXIMUM 2800

- $\varnothing 35$ 1 pz asta acciaio tenditore 1 pcs adjuster steel bar
 2 pz bussole zama esterne 2 pcs external zamak housings
 1 pz coperture PVC 1 pcs PVC cover

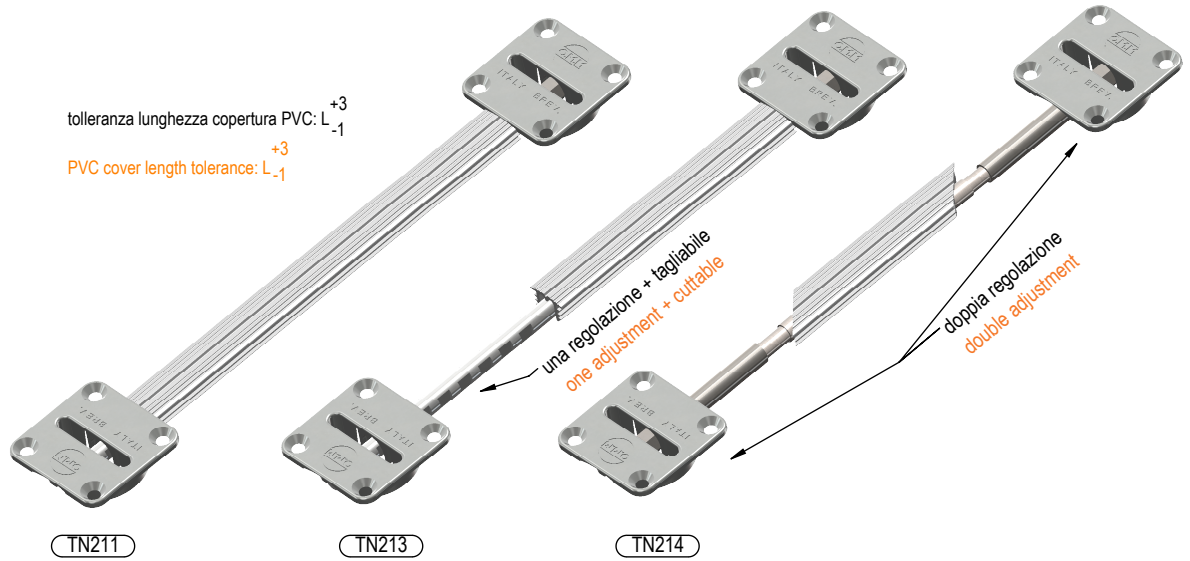

6 Nm
 60 N

test indicativi su pannello agglomerato 2500x400x20
 indicative test on chipboard panel 2500x400x20


6 Nm
 90 N

test indicativi su pannello agglomerato 2500x400x28
 indicative test on chipboard panel 2500x400x28

ACCESSORI
 ACCESSORIES



cover bussola plastica
 plastic cover cap
 grigio - grey
 cod.: P.T210.55
 nero - black
 cod.: P.T210.53

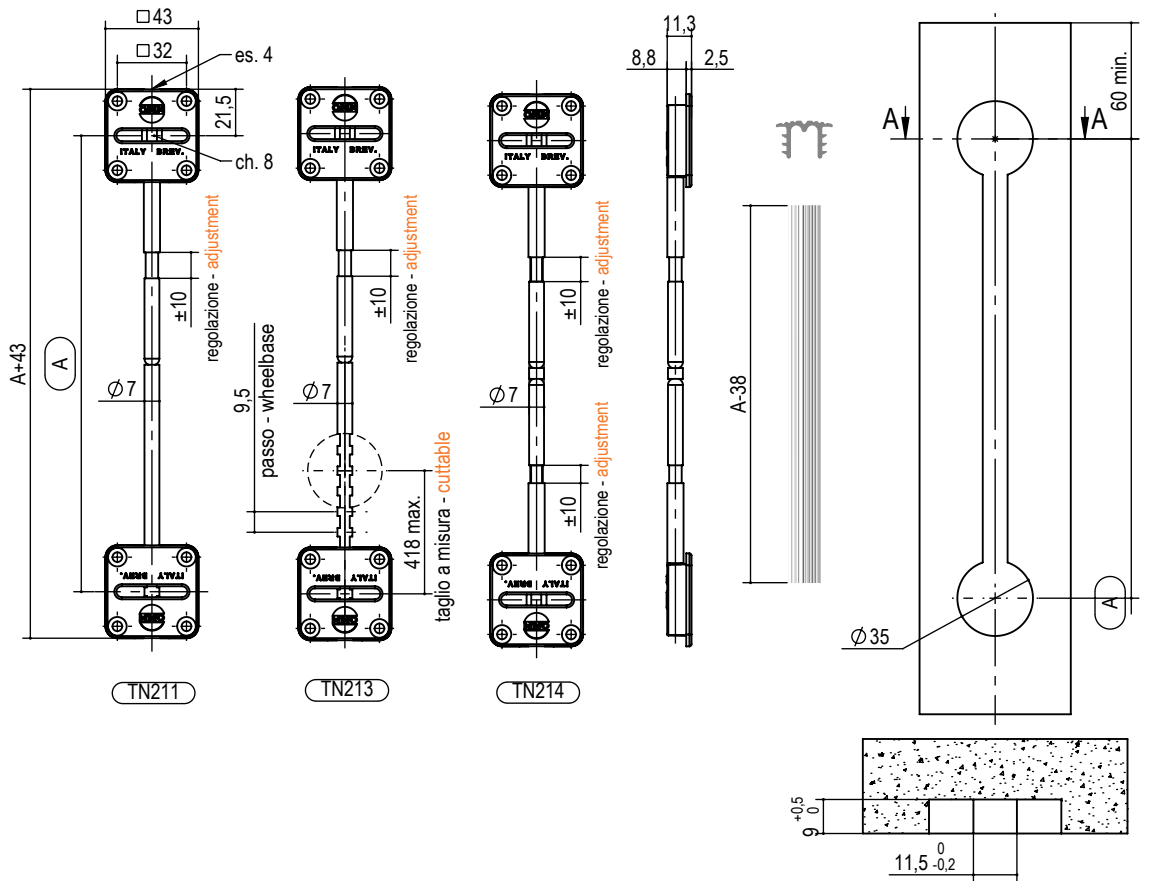

tipo type	misura measure	A	finitura finishing	Imballo su bancale Packed on pallet kg/pz	box	
					kg/box 25pz	kg/box 100pz
TN211.	1740.	1740	55 PVC Grigio - Grey PVC	0,72	18,1	72
	2040.	2040	53 PVC Nero - Black PVC	0,83	20,9	83
TN213.	2195.	2195	minimo ordine 100 pz - MOQ 100 pcs	0,89	22,3	89
TN214.	2330.	2330	misura speciale minimo ordine 300 pz -	0,94	23,5	94
	2600.	2600	special measure 300 pcs MOQ	1,05	26,3	105